
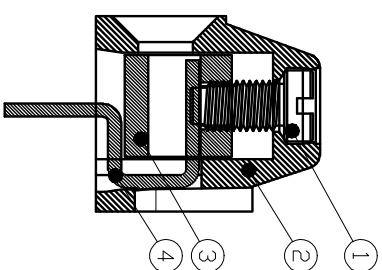
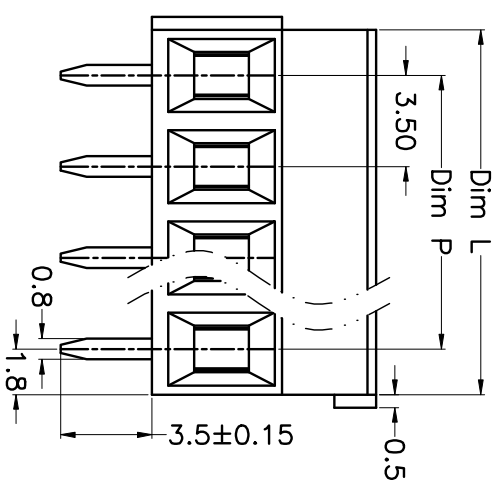
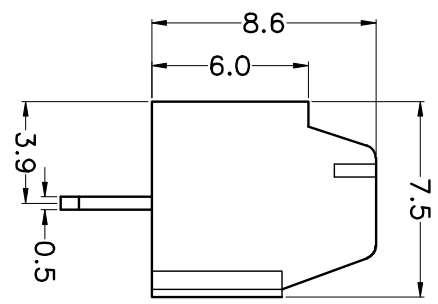


版本	修订内容	日期	绘图	批准
A1	DRG. REL	2016/10/7	方志远	梅志刚

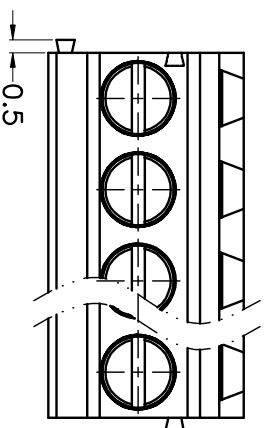

- 材质及电镀
 - ① 螺丝: M2.0, 钢, 镀锌, “-”字槽
 - ② 塑件: PA66, UL94V-0
 - ③ 方块: 黄铜, 镀镍
 - ④ 焊针: 黄铜, 镀锡

- 电气性能

UL	IEC
额定电压: 150V	130V
额定电流: 10A	10A
接触电阻: 20mΩ	
绝缘电阻: 500MΩ/1000V	
耐电压: AC1500V/1Min	
使用线径: 26-16AWG 1.5mm ²	


- 机械性能

温度范围: -40℃ ~ +105℃

瞬时温度: +250℃, 5秒

扭矩: 0.2Nm (2.04kgf.cm)

剥线长度: 5-6mm

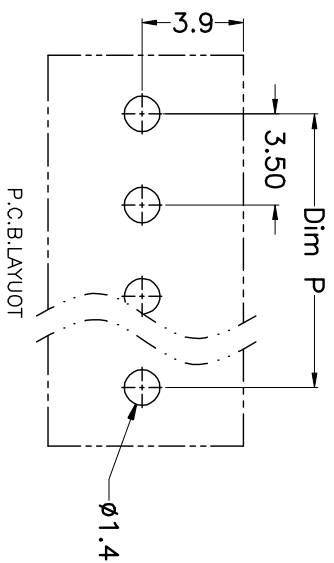


N=Number of Poles
Dim P=(N-1)x3.50
Dim L=Nx3.50

Poles	Dim	Dim P	Dim L
2-6P		±0.10	±0.15
7-12P		±0.20	±0.20
13-18P		±0.25	±0.30
19-24P		±0.30	±0.40

订购方式

KF124D-3.5-XXP-1 X-XXXXX

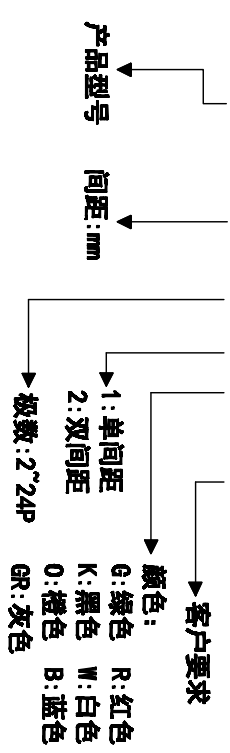

尺寸公差:	±0.5 .X ±0.3 .XX ±0.1	角度公差:	X: .X X: .XX ±5' ±3' ±1'
制图标准:	AUTO CAD	比例:	1:1
图框编号:	XF0012016-XXXX	图页:	1\1

凯峰电子
KAI FENG ELECTRONIC

慈溪市凯峰电子有限公司
CIXI KAIFENG ELECTRONIC CO.,LTD

KF124D-3.5-XXP

单位: mm

产品系列: KF124D