


P.C.B.LAYUOT

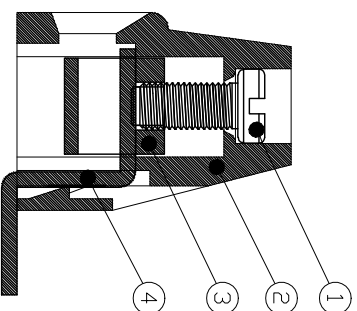

N=Number of Poles
Dim P=(N-1)x5.00
Dim L=Nx5.00

Poles	Dim P	Dim L
2-6P	±0.10	±0.15
7-12P	±0.20	±0.20
13-18P	±0.25	±0.30
19-24P	±0.30	±0.40

GENERAL TOLERANCE ANGLE TOLERANCE

X.	±0.5	X.	±5°
.X	±0.3	.X.	±3°
.XX	±0.1	.XX.	±1°

DRAWING TYPE	CUSTOMER	SHEET	1 OF 1
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.	XP0012016-xxxx		

• Material

- ① Screws : M3.0 steel, Zinc plated, “-” slot type
- ② Housing : PA66, UL94V-0
- ③ Clamp : Brass, Ni plated
- ④ Pin header : Brass, Tin plated

• Electrical


- UL IEC
- Rated voltage : 300V 250V
- Rated current : 10A 18A
- Insulation resistance: 500MΩ/DC500V
- Withstanding Voltage : AC2000V/1min
- Wire range: 24-12AWG 2.5mm²

• Mechanical

- Operating temperature: -40°C to +105°C
- Soldering temperature: 250°C ±5/5sec
- Torque: 0.5N.m (4.43lb.in)
- Strip length: 6-7mm

HOW TO ORDER

KF128R-5.0-XXP-1 X-XXXXX

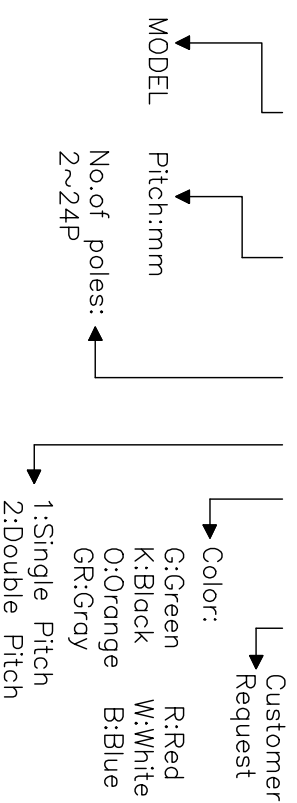

PROJECTION	TITLE
UNITS mm	KF128R-5.0-XXP
SHEET SIZE A4	SERIES KF128

KF 慈溪市凯峰电子有限公司
KAIFENG ELECTRONIC CIXI KAIFENG ELECTRONIC CO.,LTD