

• Material

- ①Screws : M3.0 steel, Zinc plated, “-” slot type
- ②Housing : PA66, UL94V-0
- ③Clamp : Brass, Ni plated
- ④Pin header : Brass, Tin plated

• Electrical


- UL IEC
- Rated voltage : 300V 250V
- Rated current : 20A 20A
- Insulation resistance: 500MΩ/DC500V
- Withstanding Voltage : AC2000V/1min
- Wire range: 24-12AWG 4.0mm²

• Mechanical

- Operating temperature: -40°C to +105°C
- Soldering temperature: 250°C±5/5sec
- Torque: 0.5N.m (4.43lb.in)
- Strip length: 6-7mm

HOW TO ORDER

KF129R-5.0-XXP-1 X-XXXXX

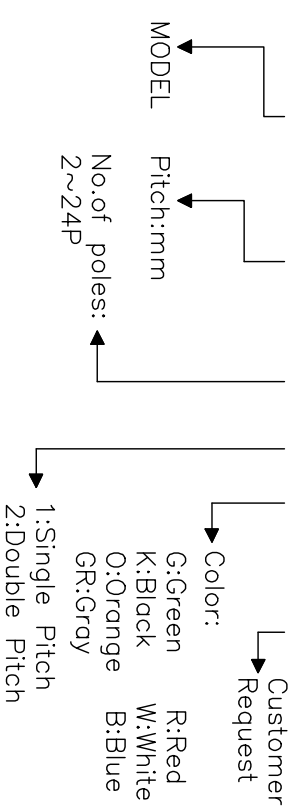

N=Number of Poles
Dim P=(N-1)x5.00
Dim L=Nx5.00

Poles	Dim P	Dim L
2-6P	±0.10	±0.15
7-12P	±0.20	±0.20
13-18P	±0.25	±0.30
19-24P	±0.30	±0.40

GENERAL TOLERANCE ANGLE TOLERANCE

X.	±0.5	X.	±5°
.X	±0.3	.X.	±3°
.XX	±0.1	.XX.	±1°

DRAWING TYPE	CUSTOMER	SHEET	1 OF 1
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.	XP0012016-xxxx		

PROJECTION	TITLE
UNITS	KF129R-5.0-XXP
SHEET SIZE	A4
SERIES	KF129R

KATFENG ELECTRONIC **慈溪市凯峰电子有限公司**
CIXI KAIFENG ELECTRONIC CO.,LTD

REV.	DESCRIPTION	DATE	DRAWN	APPROVED
A1	DWG.REL	2016/10/7	FANG	YANG