


REV.	DESCRIPTION	DATE	DRAWN	APPROVED
A1	DWG.REL	2016/10/7	FANG	YANG

- Material
Screws : M3.0 steel, Zinc plated
Reed : Phosphor bronze, Ni plated
Housing : PA66, UL94V-0

- Electrical UL IEC
Rated voltage : 300V 250V
Rated current : 10A 24A
Insulation resistance: 500MΩ/DC500V
Withstanding Voltage : AC2000V/1min
Wire range: 28-16AWG 2.5mm²

- Mechanical
Operating temperature: -40°C to +105°C
Soldering temperature: 250°C ±5/5sec
Torque: 0.5N.m (4.43Lb.in)
Strip length: 5-6mm

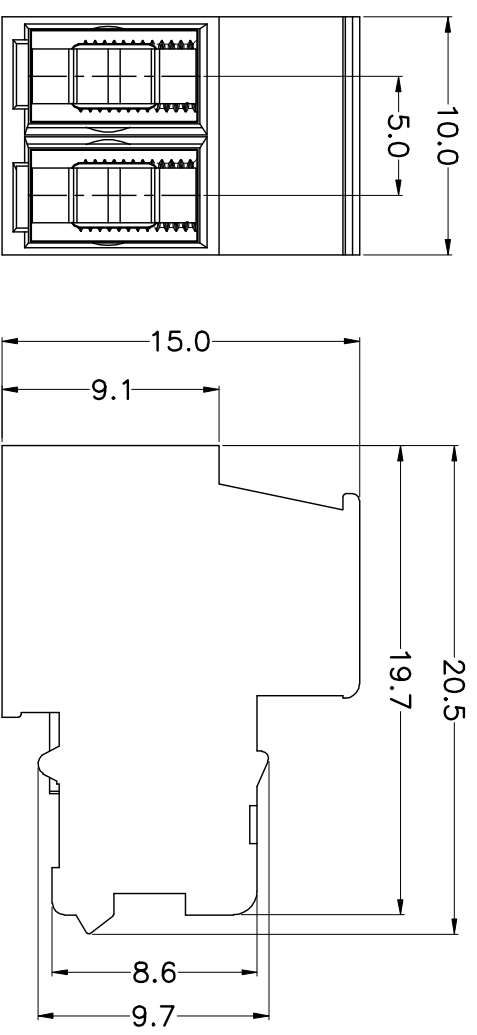

GENERAL TOLERANCE	ANGLE TOLERANCE	TOLERANCE
X: ±0.5	X: .X°	±5°
X: ±0.3	X: .X'	±3'
.XX: ±0.1	.XX'	±1'
DRAWING TYPE	CUSTOMER	
SCALE	1:1	SHEET 1 OF 1
DRAWING NO.	XP0012016-xxxx	

PROJECTION	TITLE
mm	KF332-B-5.0-XXP
UNITS	SHEET SIZE
A4	KF332-B
SHEET SIZE	SERIES
A4	KF332-B

凯峰电子有限公司
KAIFENG ELECTRONIC CO.,LTD
CIXI KAIFENG ELECTRONIC CO.,LTD