


REV.	DESCRIPTION	DATE	DRAWN	APPROVED
A1	DWG.REL	2016/10/7	FANG	YANG

- Material
  - ①Button : PA66, UL94V-0
  - ②Cover : PA66, UL94V-0
  - ③Housing : PA66, UL94V-0
  - ④Pin header A:Phosphor bronze or Brass, Tin plated
  - ⑤Pin header B :Phosphor bronze or Brass, Tin plated

- Electrical
  - UL IEC
  - Rated voltage : 300V 450V
  - Rated current : 7A 9A
  - Insulation resistance: 500MΩ/DC500V
  - Withstanding Voltage : AC2000V/1min
  - Wire range: 24-18AWG 0.5mm<sup>2</sup>


- Mechanical
  - Operating temperature:-40℃~+105℃
  - Soldering temperature:250℃±5/5sec
  - Strip length: 8-9mm

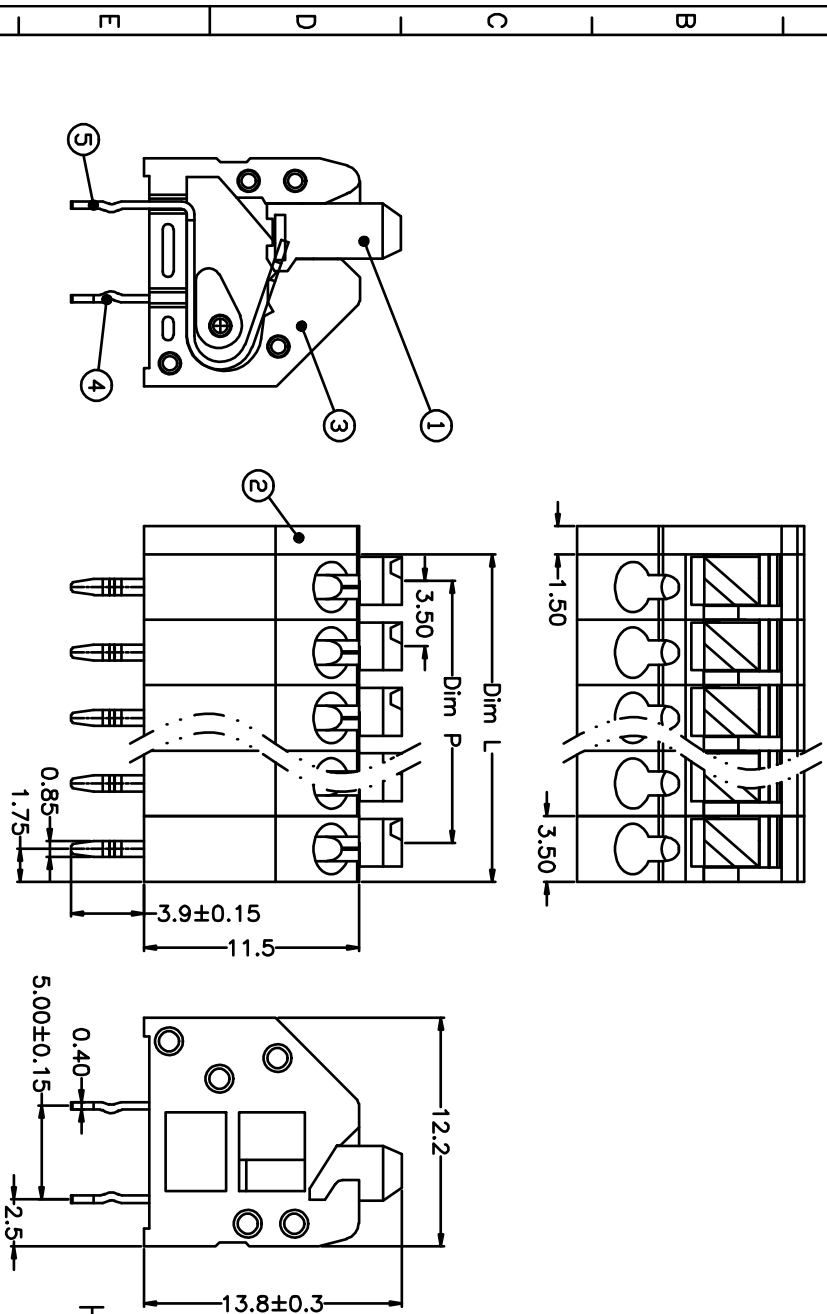

N=Number of Poles  
Dim P=(N-1)×3.5  
Dim L=N×3.5

Poles	Dim P	Dim L
2-6P	±0.10	±0.15
7-12P	±0.20	±0.20
13-18P	±0.25	±0.30
19-24P	±0.30	±0.40

### HOW TO ORDER

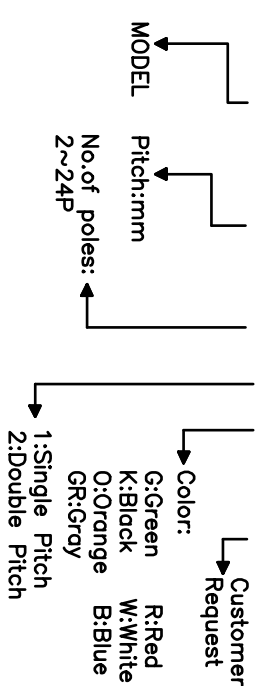

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.5	X.	±5'
.X	±0.3	.X'	±3'
.XX	±0.1	.XX'	±1'

DRAWING TYPE	CUSTOMER	SHEET	1 OF 1
SCALE	1:1	SHEET	1 OF 1

PROJECTION	TITLE
UNITS	mm
SHEET SIZE	A4
SERIES	KF250

DRAWING NO.	XP0012016-xxxx
-------------	----------------

**KF250B-3.5-XXP**

**凯峰电子有限公司**  
CIXI KAIFENG ELECTRONIC CO.,LTD