

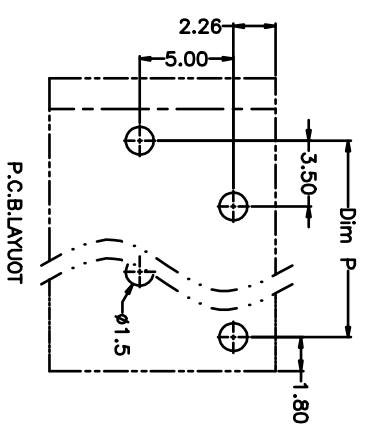
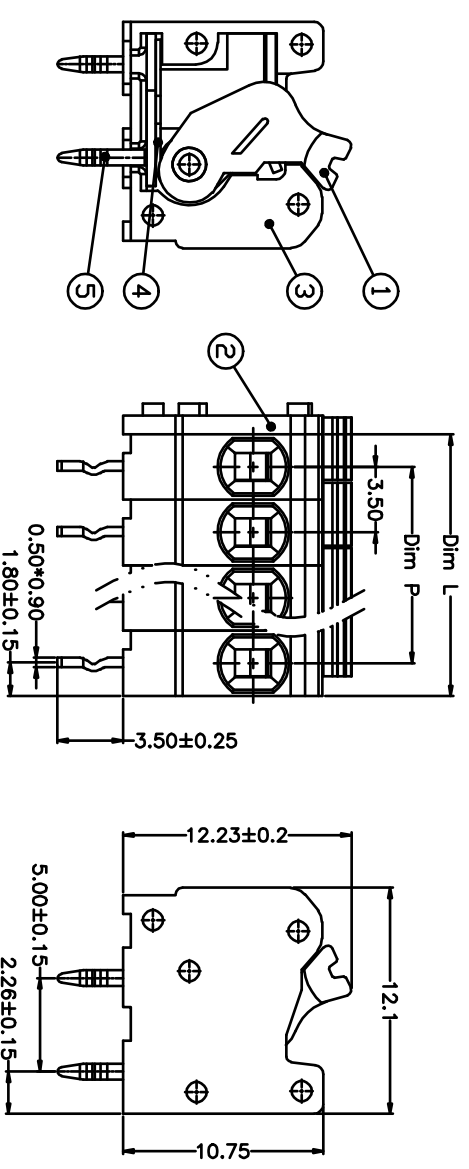


REV.	DESCRIPTION	DATE	DRAWN	APPROVED
A1	DWG.REL	2016/10/7	FANG	YANG



N=Number of Poles  
Dim P=(N-1)\*3.50  
Dim L=N\*3.50


Series	Dim	Dim P	Dim L
2-6P	±0.10	±0.15	±0.15
7-12P	±0.20	±0.20	±0.20
13-18P	±0.25	±0.30	±0.30
19-24P	±0.30	±0.40	±0.40

- Material
  - ⊙Button : PA66, UL94V-0
  - ⊙Cover : PA66, UL94V-0
  - ⊙Housing : PA66, UL94V-0
  - ⊙Reed : Stainless steel
  - ⊙Pin header : Brass, Tin plated

- Electrical UL IEC
  - Rated voltage : 300V 450V
  - Rated current : 7A 15A
  - Insulation resistance: 500MΩ/DC500V
  - Withstanding Voltage : AC2000V/1min
  - Wire range: 22-16AWG 1.5mm<sup>2</sup>

- Mechanical
  - Operating temperature: -40°C to +105°C
  - Soldering temperature: 250°C ±5/5sec
  - Strip length: 8-9mm

HOW TO ORDER

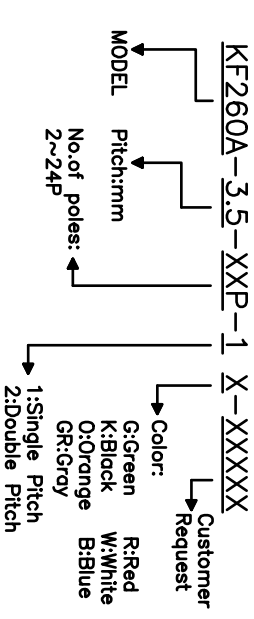

GENERAL TOLERANCE	ANGLE TOLERANCE
X. ±0.5	X. ±5°
.X ±0.3	.X ±3'
.XX ±0.1	.XX ±1'

DRAWING TYPE	CUSTOMER
SCALE	1:1 SHEET 1 OF 1

DRAWING NO.	XP0012016-xxxx
-------------	----------------

PROJECTION	TITLE
UNITS mm	KF260A-3.5-XXP
SHEET SIZE A4	SERIES KF260

**凯峰电子有限公司**  
KAIFENG ELECTRONIC CO.,LTD  
CIXI KAIFENG ELECTRONIC CO.,LTD