
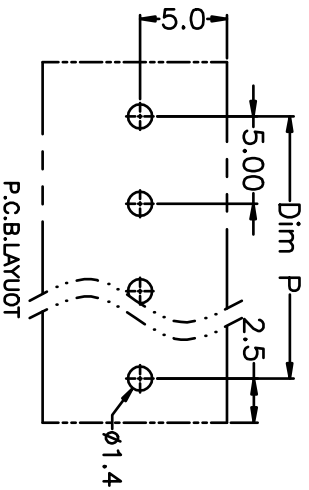
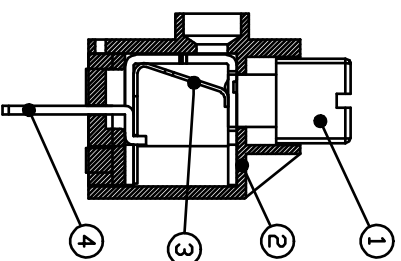
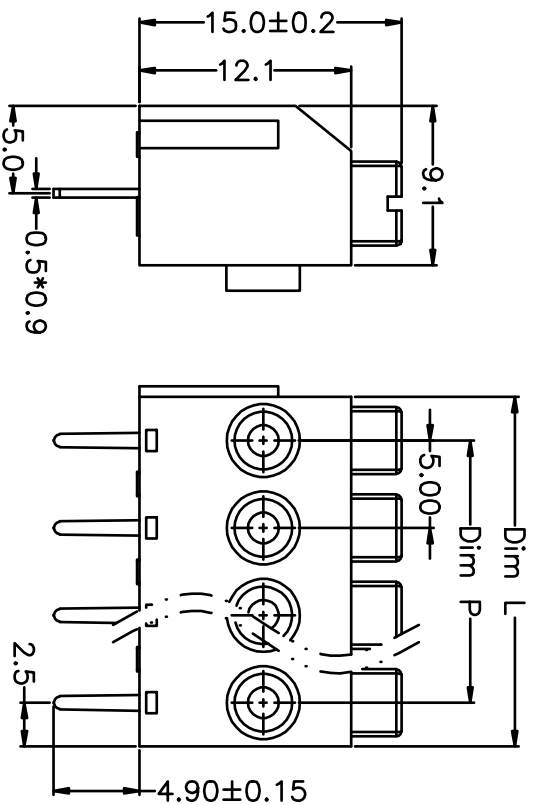


REV.	DESCRIPTION	DATE	DRAWN	APPROVED
A1	DWG.REL	2016/10/7	FANG	YANG

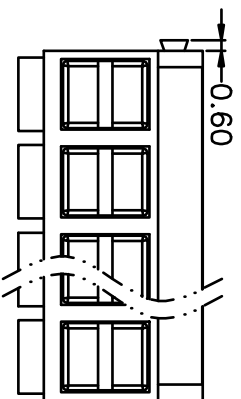

Poles	Dim P	Dim L	Dim P	Dim L
2-6P	$\pm 0.10$	$\pm 0.15$	$\pm 0.20$	$\pm 0.20$
7-12P	$\pm 0.20$	$\pm 0.20$	$\pm 0.25$	$\pm 0.30$
13-18P	$\pm 0.25$	$\pm 0.30$	$\pm 0.30$	$\pm 0.40$
19-24P	$\pm 0.30$	$\pm 0.40$		

N=Number of Poles  
 Dim P=(N-1)x5.00  
 Dim L=Nx5.00

GENERAL TOLERANCE ANGLE TOLERANCE


X.	$\pm 0.5$	X.	$\pm 5^\circ$
X	$\pm 0.3$	X'	$\pm 3'$
.XX	$\pm 0.1$	.XX'	$\pm 1'$
DRAWING TYPE	CUSTOMER	SCALE	1:1
DRAWING NO.	XP0012016-xxxx	SHEET	1 OF 1

- Material
  - ØButton : PA66, UL94V-0
  - ØCover : PA66, UL94V-0
  - ØHousing : PA66, UL94V-0
  - ØReed : Stainless steel
  - ØPin header : Brass, Tin plated

- Electrical UL IEC
  - Rated voltage : 300V 250V
  - Rated current : 8A 10A
  - Insulation resistance: 500MΩ/DC500V
  - Withstanding Voltage : AC2000V/1min
  - Wire range: 22-18AWG 1.0mm<sup>2</sup>

- Mechanical
  - Operating temperature:-40°C~+105°C
  - Soldering temperature:250°C±5/5sec
  - Strip length: 8-9mm

HOW TO ORDER

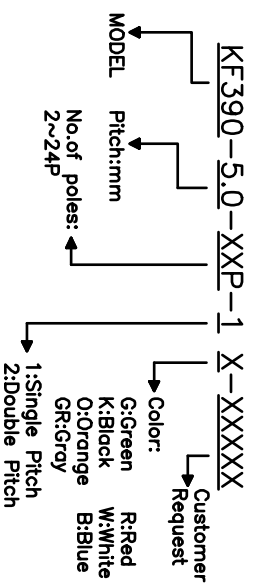

PROJECTION	TITLE	KF390-5.0-XXP
UNITS	mm	
SHEET SIZE	A4	SERIES KF390

**凯峰电子** 慈溪市凯峰电子有限公司  
 KAIFENG ELECTRONIC CIXI KAIFENG ELECTRONIC CO.,LTD