

# Altech Corp.®



Quality  
Endorsed  
Company



- ### Features
- Small size
  - Universal input
  - Three-year Warranty



Class II Isolation



## Low Profile Power Supplies

# PSD-15 Series

## FEATURES

- High Efficiency
- 100% Full Load Burn-In
- Low Ripple & Noise
- Adjustable DC Voltage Output
- Class II Isolation Level
- UL62368-1 and CAN / CSA C22.2
- Protections: Overload / Over Voltage / Short Circuit
- Three-year Warranty

## Low Profile

- Small size
- Universal input
- Three-year Warranty



Input: 90-264V AC; 50/60HZ  
Output Voltage: 5V-48V DC  
Rated Power: 15W max.



## CATALOG NUMBER

PSD-1505

PSD-1512

PSD-1515

PSD-1524

PSD-1548

## INPUT

Input Voltage	90-264VAC					
Input Frequency	47-63Hz					
Inrush Current	25 Amps max. at 115VAC/60Hz, Full Load & 45Amps max. at 240VAC/50Hz, Full Load					
AC Current	0.5A/115VAC 0.25A/230VAC					
Leakage Current (MAX)	<0.25mA/240VAC					
Efficiency	79%	85%	85%	86%	87%	

## OUTPUT

DC Voltage	5V	12V	15V	24V	48V
Rated Current	2A	1.25A	1A	0.63A	0.32A
Rated Power	10W	15W	15W	15W	15W
Ripple and Noise	80mVp-p	120mVp-p	120mVp-p	150mVp-p	240mVp-p
Line Regulation	±1%				
Load Regulation	±1%				
Setup, Rise, Hold Up Time	2S/ 80mS/ 15mS (115V/60HZ MAX ROAD); 1S/ 80mS/ 30mS (230V/50HZ MAX ROAD)				

## ENVIRONMENTAL

Operating Temperature	-20°C to 50°C, Full Load, Normal Operation
Storage Temperature	-40°C to 80°C
Storage Humidity	10 ~ 95% RH
Working Humidity	20% ~ 90% RH Non-Condensing

## PROTECTIONS

Overload Protection	>130%-200% Rated Output Power Protection type: Hiccup Mode- recovers automatically after fault condition is removed
Over Voltage Protection	110~145% Protection Type: Clamp by Zener diode
Short Circuit Protection	Protection to Zero Voltage
Over Current Protection	110%-180%

## SAFETY & EMC


Safety Regulations	UL60950-1, UL508, BSMI CNS14336-1, TUV EN61558-2-16 IEC60950-1, EAC TPTC 004, TUV EN60950-1 UL62368-1 and CAN / CSA C22.2 No.62368-1-14
Withstand Voltage	I/P-O/P: 3KVAC
Isolation Resistance	I/P-O/P: 100M Ohms / 500VDC / 25 / 70% RH
EMC Emission	EN55032(CISPR32), CNS13438 Class B, EN61000-3-2 Class A, EN61000-3-3, EN61000-4-2,3,4,5,6,8,11, EN55024, EN55035, EN61000-6-2, EN61204-3

## OTHER


MTBF	200,000 Hours Minimum at Full Load at 25°C Ambient
Size	90 x 18 x 58mm
Weight	78g / pcs
Packaging	100PCS/CTN

## Mechanical Specification


Pin #	Assignment	Pin #	Assignment
1	+V	3	AC / N
2	-V	4	AC / L

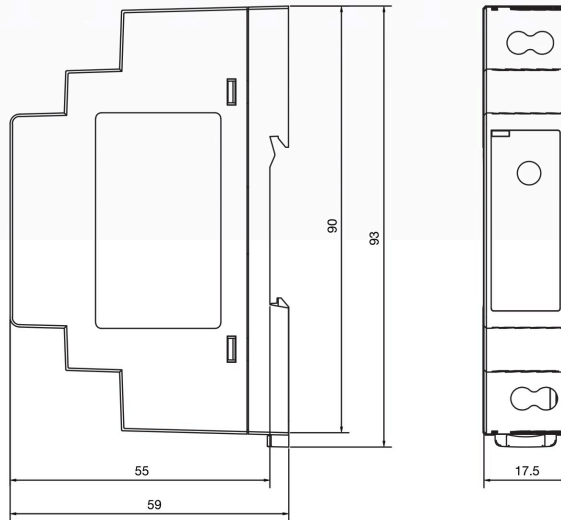


## Block Diagram

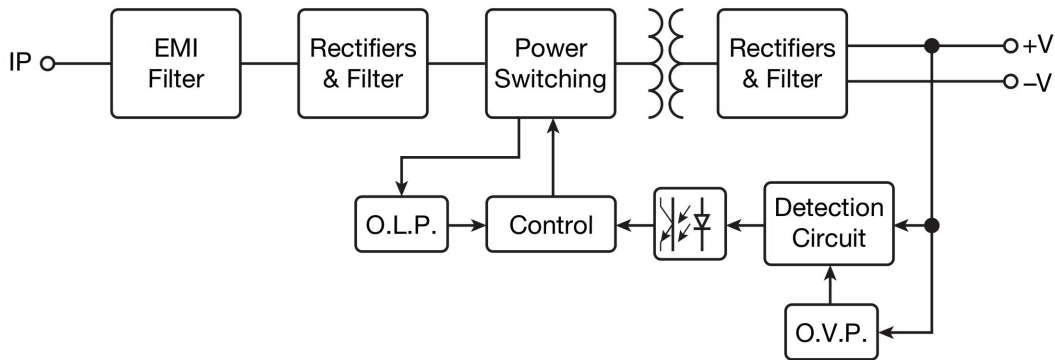

**Deduction Curve and Temperature:**

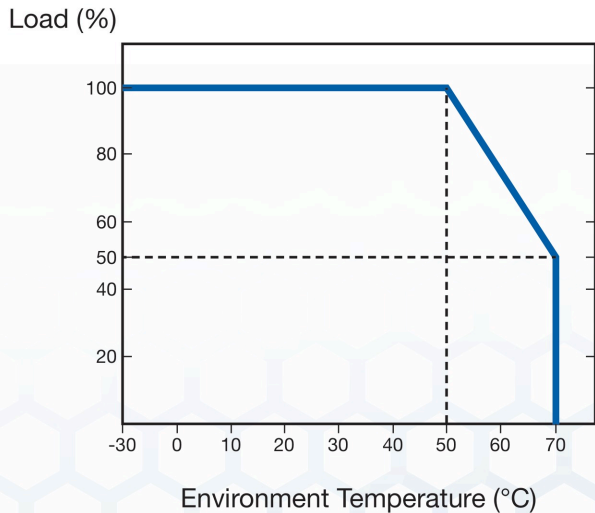

**Minus Output and Input Voltage Curves:**

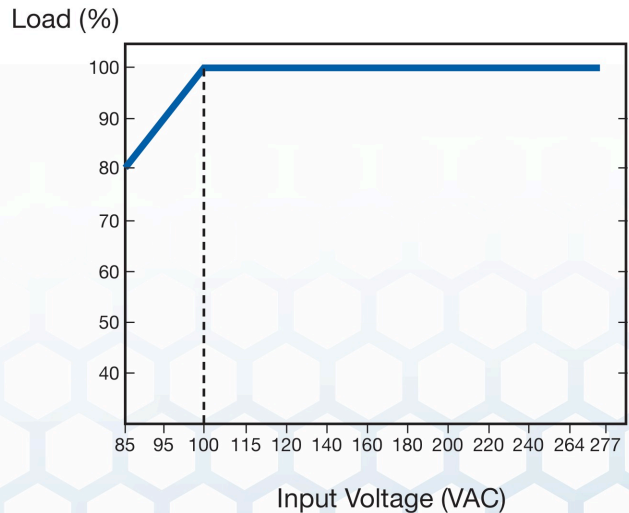

# PSD-30 Series

## FEATURES

- High Efficiency
- 100% Full Load Burn-In
- Low Ripple & Noise
- Adjustable DC Voltage Output
- Class II Isolation Level
- UL62368-1 and CAN / CSA C22.2
- Protections: Overload / Over Voltage / Short Circuit
- Three-year Warranty

**Low Profile**

- Small size
- Universal input
- Three-year Warranty



Input: 90-264V AC; 50/60HZ  
 Output Voltage: 5V-48V DC  
 Rated Power: 30W max.



## CATALOG NUMBER

**PSD-3005**

**PSD-3012**

**PSD-3015**

**PSD-3024**

**PSD-3048**

## INPUT

Input Voltage	90-264VAC				
Input Frequency	47-63Hz				
Inrush Current	25 Amps max. at 115VAC/60Hz, Full Load & 45Amps max. at 240VAC/50Hz, Full Load				
AC Current	0.88A/115VAC 0.48A/230VAC				
Leakage Current (MAX)	<0.25mA/240VAC				
Efficiency	82%	88%	89%	89%	90%

## OUTPUT

DC Voltage	5V	12V	15V	24V	48V
Rated Current	3A	2A	2A	1A	0.6A
Rated Power	15W	24W	30W	24W	29W
Ripple and Noise	80mVp-p	120mVp-p	120mVp-p	150mVp-p	240mVp-p
Line Regulation	±1%				
Load Regulation	±1%				
Setup, Rise, Hold Up Time	500mS/ 50mS/ 12mS (115V/60HZ MAX ROAD) 500mS/ 50mS/ 30mS (230V/50HZ MAX ROAD)				

## ENVIRONMENTAL

Operating Temperature	-20°C to 50°C, Full Load, Normal Operation
Storage Temperature	-40°C to 80°C
Storage Humidity	10 ~ 95% RH
Working Humidity	20% ~ 90% RH Non-Condensing

## PROTECTIONS

Overload Protection	>130%-200% Rated Output Power Protection type: Hiccup Mode- recovers automatically after fault condition is removed
Over Voltage Protection	110~145% Protection Type: Clamp by Zener diode
Short Circuit Protection	Protection to Zero Voltage
Over Current Protection	110%-180%

## SAFETY & EMC



Safety Regulations	UL60950-1, UL508, BSMI CNS14336-1, TUV EN61558-2-16 IEC60950-1, EAC TPTC 004, TUV EN60950-1 UL62368-1 and CAN / CSA C22.2 No.62368-1-14
Withstand Voltage	I/P-O/P: 3KVAC
Isolation Resistance	I/P-O/P: 100M Ohms / 500VDC / 25 / 70% RH
EMC Emission	EN55032 (CISPR32), CNS13438 Class B, EN61000-3-2 Class A, EN61000-3-3, EN61000-4-2,3,4,5,6,8,11, EN55024, EN55035, EN61000-6-2, EN61204-3

## OTHER


MTBF	200,000 Hours Minimum at Full Load at 25°C Ambient
Size	90 x 35 x 58mm
Weight	120g / pcs
Packaging	100PCS/CTN

For the latest on Altech Power Supply specifications please visit [www.altechcorp.com/power](http://www.altechcorp.com/power).


Dimensions and Installation:

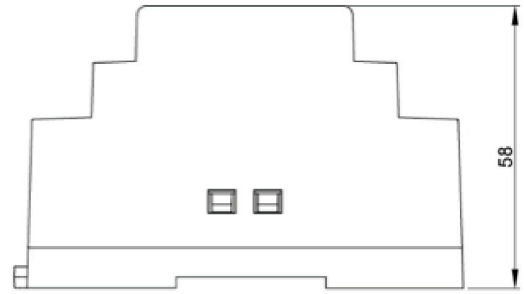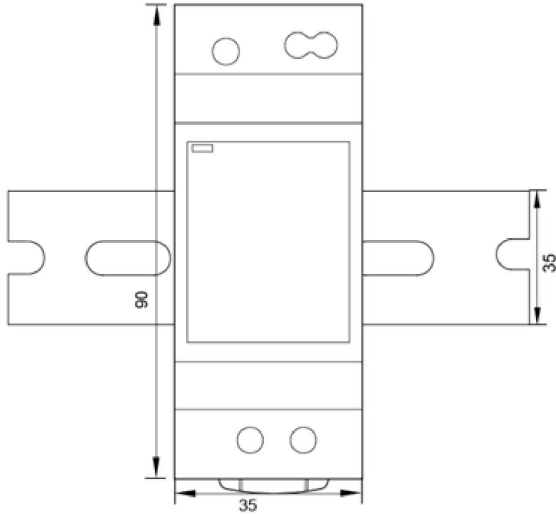

Deduction Curve and Temperature:

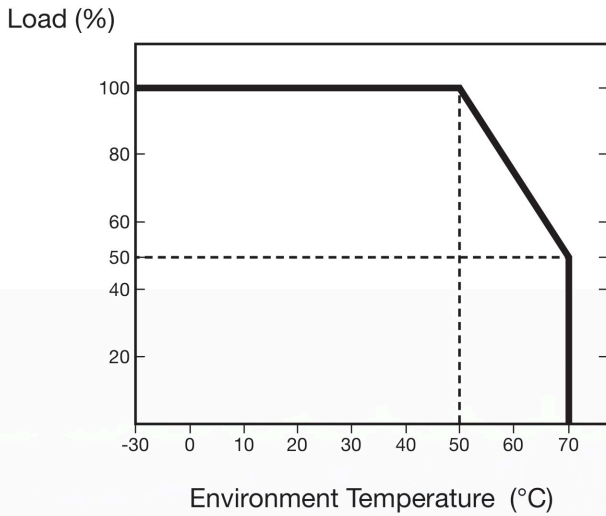

Minus Output and Input Voltage Curves:

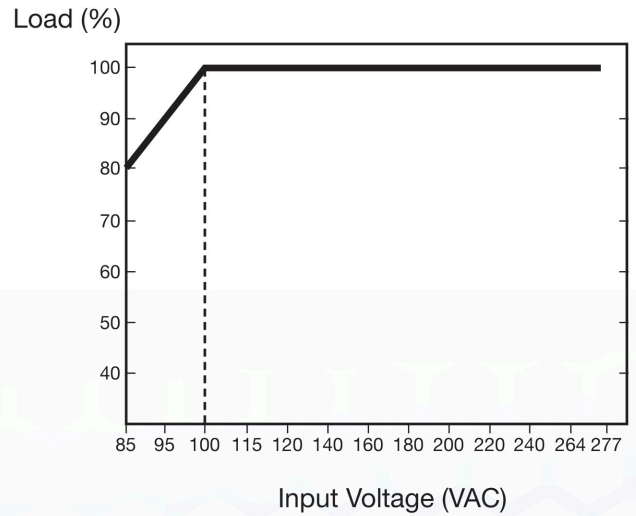


# PSD-60 Series

## FEATURES

- High Efficiency
- 100% Full Load Burn-In
- Low Ripple & Noise
- Adjustable DC Voltage Output
- Class II Isolation Level
- UL62368-1 and CAN / CSA C22.2
- Protections: Overload / Over Voltage / Short Circuit
- Three-year Warranty

## Low Profile

- Small size
- Universal input
- Three-year Warranty

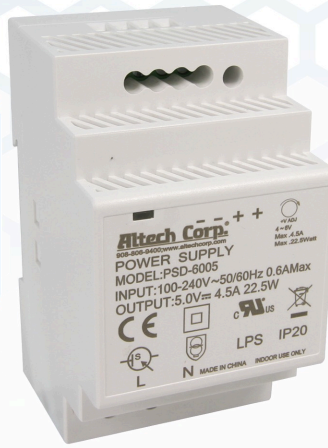

Input: 90-264V AC; 50/60Hz  
Output Voltage: 5V-48V DC  
Rated Power: 60W max.



## CATALOG NUMBER

**PSD-6005**

**PSD-6012**

**PSD-6015**

**PSD-6024**

**PSD-6048**

## INPUT

INPUT	Input Voltage	90-264VAC				
	Input Frequency	47-63Hz				
	Inrush Current	30Amps max. at 115VAC/60Hz, Full Load & 60Amps max. at 240VAC/50Hz, Full Load				
	AC Current	1.2A/115VAC 0.8A/230VAC				
	Leakage Current (MAX)	<0.25mA/240VAC				
	Efficiency	85%	88%	89%	90%	91%

## OUTPUT

DC Voltage	5V	12V	15V	24V	48V
Rated Current	4.5A	4.5A	4A	2.5A	1.25A
Rated Power	23W	54W	60W	60W	60W
Ripple and Noise	80mVp-p	120mVp-p	120mVp-p	150mVp-p	240mVp-p
Line Regulation	±1%				
Load Regulation	±1%				
Setup, Rise, Hold Up Time	500mS/ 80mS/ 12mS (115V/60HZ MAX ROAD) 500mS/ 80mS/ 30mS (230V/50HZ MAX ROAD)				

## ENVIRONMENTAL

Operating Temperature	-20°C to 50°C, Full Load, Normal Operation
Storage Temperature	-40°C to 80°C
Storage Humidity	10 ~ 95% RH
Working Humidity	20% ~ 90% RH Non-Condensing

## PROTECTIONS

Overload Protection	>130%-200% Rated Output Power Protection type: Hiccup Mode- recovers automatically after fault condition is removed
Over Voltage Protection	110~145% Protection Type: Clamp by Zener diode
Short Circuit Protection	Protection to Zero Voltage
Over Current Protection	110%-180%

## SAFETY & EMC


Safety Regulations	UL60950-1, UL508, BSMI CNS14336-1, TUV EN61558-2-16 IEC60950-1, EAC TPTC 004, TUV EN60950-1 UL62368-1 and CAN / CSA C22.2 No.62368-1-14
Withstand Voltage	I/P-O/P: 3KVAC
Isolation Resistance	I/P-O/P: 100M Ohms / 500VDC / 25 / 70% RH
EMC Emission	EN55032 (CISPR32), CNS13438 Class B, EN61000-3-2 Class A, EN61000-3-3, EN61000-4-2,3,4,5,6,8,11, EN55024, EN55035, EN61000-6-2, EN61204-3

## OTHER

MTBF	200,000 Hours Minimum at Full Load at 25°C Ambient
Size	90 x 52.5 x 58mm
Weight	190g / pcs
Packaging	100PCS/CTN


For the latest on Altech Power Supply specifications please visit [www.altechcorp.com/power](http://www.altechcorp.com/power).

Mechanical Specification

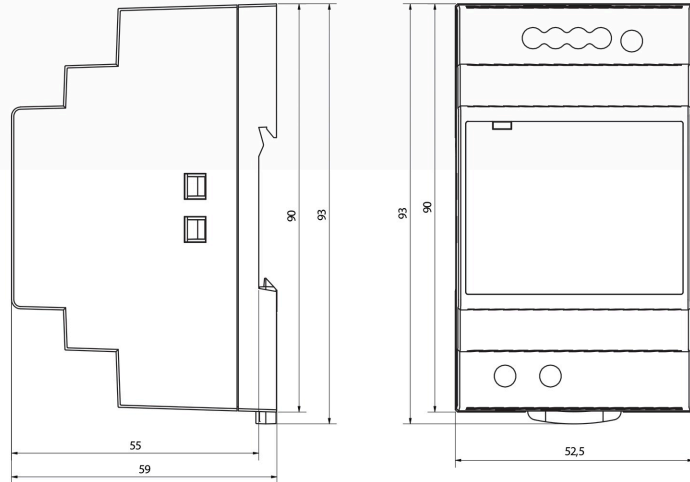


Block Diagram

Deduction Curve and Temperature:

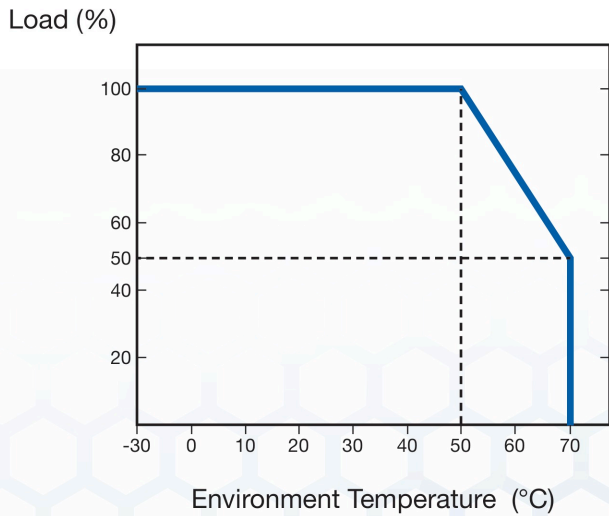

Minus Output and Input Voltage Curves:

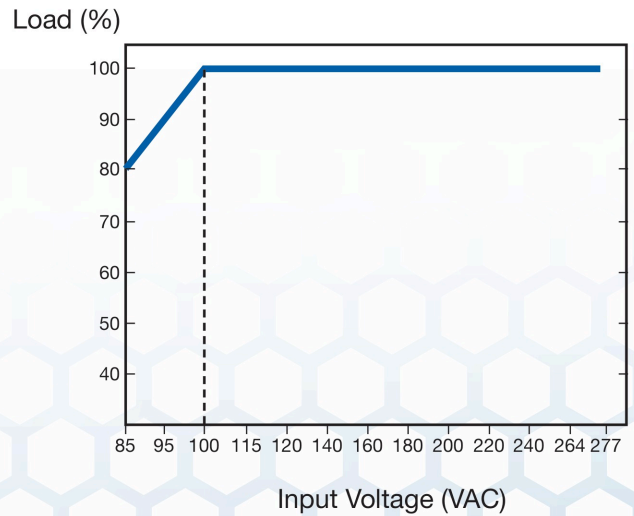

# PSD-100 Series

## FEATURES

- High Efficiency
- 100% Full Load Burn-In
- Low Ripple & Noise
- Adjustable DC Voltage Output
- Class II Isolation Level
- UL62368-1 and CAN / CSA C22.2
- Protections: Overload / Over Voltage / Short Circuit
- Three-year Warranty

**Low Profile**

- Small size
- Universal input
- Three-year Warranty



Input: 90-264V AC; 50/60HZ  
Output Voltage: 5V-48V DC  
Rated Power: 100W max.



## CATALOG NUMBER

**PSD-10012**

**PSD-10015**

**PSD-10024**

**PSD-10048**

## INPUT

Input Voltage	90-264VAC			
Input Frequency	47-63Hz			
Inrush Current	35Amps max. at 115VAC/60Hz, Full Load & 70Amps max. at 240VAC/50Hz, Full Load			
AC Current	3A/115VAC 1.6A/230VAC			
Leakage Current (MAX)	<0.25mA/240VAC			
Efficiency	88%	89%	90%	90%

## OUTPUT

DC Voltage	12V	15V	24V	48V
Rated Current	7.1A	6.13A	3.8A	2.1A
Rated Power	86W	92W	91W	100W
Ripple and Noise	120mVp-p	120mVp-p	150mVp-p	240mVp-p
Line Regulation	±1%			
Load Regulation	±1%			
Setup, Rise, Hold Up Time	500mS/ 60mS/ 12mS (115V/60HZ MAX ROAD) 500mS/ 60mS/ 30mS (230V/50HZ MAX ROAD)			

## ENVIRONMENTAL

Operating Temperature	-20°C to 50°C, Full Load, Normal Operation.
Storage Temperature	-40°C to 80°C
Storage Humidity	10 ~ 95% RH
Working Humidity	20% ~ 90% RH Non-Condensing

## PROTECTIONS

Overload Protection	>130%-200% Rated Output Power Protection type: Hiccup Mode- recovers automatically after fault condition is removed
Over Voltage Protection	110~145% Protection Type: Clamp by Zener diode
Short Circuit Protection	Protection to Zero Voltage
Over Current Protection	110%-180%

## SAFETY & EMC

Safety Regulations	UL60950-1, UL508, BSMI CNS14336-1, TUV EN61558-2-16 IEC60950-1, EAC TPTC 004, TUV EN60950-1 UL62368-1 and CAN / CSA C22.2 No.62368-1-14
Withstand Voltage	I/P-O/P: 3KVAC
Isolation Resistance	I/P-O/P: 100M Ohms / 500VDC / 25 / 70% RH
EMC Emission	EN55032 (CISPR32), CNS13438 Class B, EN61000-3-2 Class A, EN61000-3-3, EN61000-4-2,3,4,5,6,8,11, EN55024, EN55035, EN61000-6-2, EN61204-3


## OTHER

MTBF	200,000 Hours Minimum at Full Load at 25°C Ambient
Size	90 x 70 x 58mm
Weight	270g / pcs
Packaging	50 PCS/CTN


For the latest on Altech Power Supply specifications please visit [www.altechcorp.com/power](http://www.altechcorp.com/power).

## Mechanical Specification


Pin #	Assignment	Pin #	Assignment
1,2	-V	5	AC / L
3,4	+V	6	AC / N
O	Voltage adjuster		

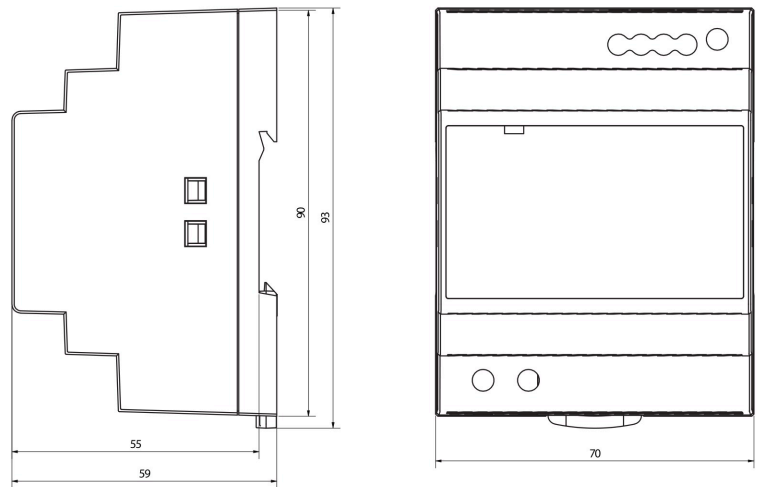


## Block Diagram

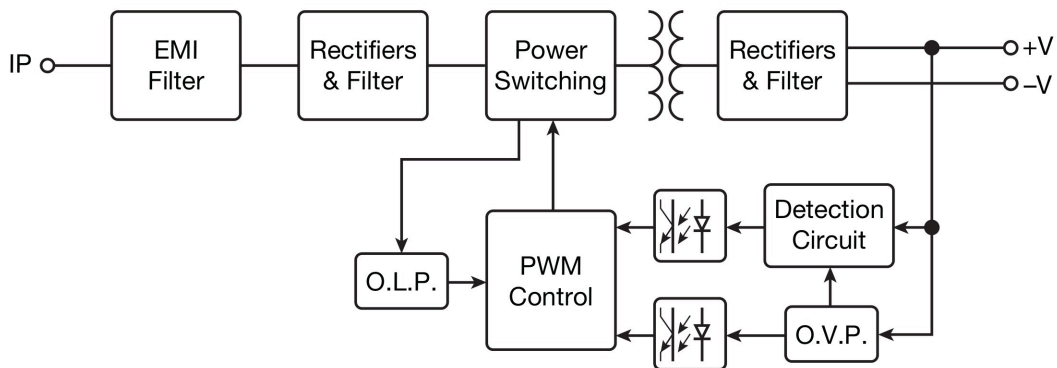

**Deduction Curve and Temperature:**

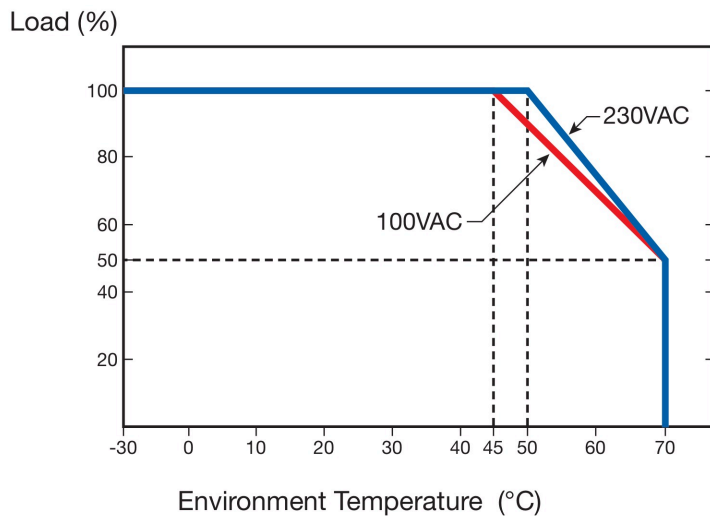

**Minus Output and Input Voltage Curves:**

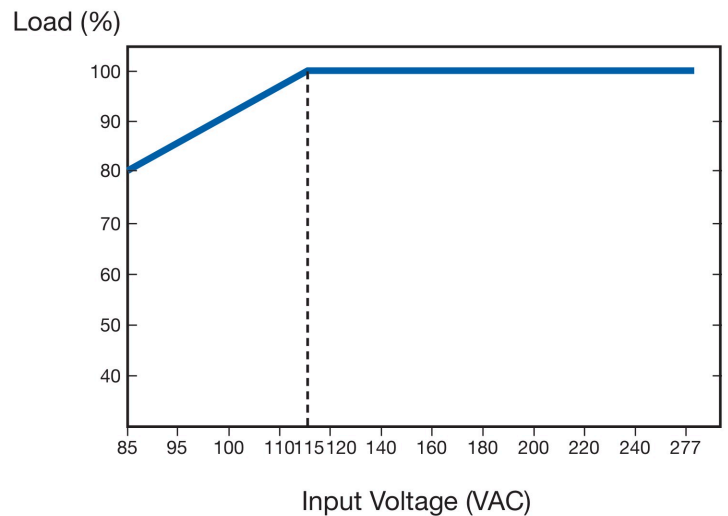



### Altech Search

Google



[Home](#)

[Stock Check](#)

[Distributors](#)

[Information](#)

[News](#)

[Contact](#)

[Rep/Dist Login](#)

[Altech Mexico](#)

### WEB TOOLS

[Drawings & Photos](#)

[Enclosure Finder](#)

[Altech Videos](#)

[Request for Quote](#)

[Sample Request](#)

[Catalog Request](#)

[Product Crossings](#)

[eBook Catalog](#)

### PRODUCT MENU

[ATEX Products](#)

[Circuit Protection/Control >](#)

[Connectors >](#)

[Enclosures >](#)

[Fuses >](#)

[Digital Panel Meters](#)

[Foot Switches](#)

[Interface Modules >](#)

[Panel Accessories](#)

[Power Supplies](#)

[Power Semi-Conductors](#)

[PCB Connection Technology >](#)

[Programmable Controllers](#)

[Push Buttons & Pilot Lights >](#)

[Relays >](#)

[Sensors >](#)

[Safety Switches >](#)

[Standard Switches >](#)

[Solid State Relays](#)

[Terminal Blocks >](#)

[Test & Measurement](#)

[Tower Lights](#)

### New Products and Promotions

The NEW

# Altech



# ENCLOSURE FINDER

[Click here to begin](#)

### CIRCUIT PROTECTION



Circuit  
Protection  
Devices



Busbar  
& Power  
Distribution



Contactors,  
Overload  
Relays, Manual  
Motor Starters



Motor  
Disconnect  
Switches



European  
Fuses &  
Holders

### CONNECTORS



Pin & Sleeve  
Devices



Receptacles

### ENCLOSURES



Industrial  
& ATEX  
Enclosures



DIN  
Enclosures



Control  
Enclosures and  
Suspension  
Systems

### FOOT SWITCHES



Industrial



Medical

### MODULES & RELAYS



Interface  
Modules



Safety  
Relays



Industrial  
& Slimline  
Relays

### PANEL ACCESSORIES



Panel Lights



Heaters,  
Filters &  
Thermostats

### SPARE PARTS



European  
Spare Parts

### PILOT DEVICES



22 & 30 mm  
Push Buttons  
& Enclosures



Pilot Lights  
& E-Stops

### POWER DEVICES



Power  
Supplies



DC-UPS &  
Battery  
Chargers

### POWER MANAGEMENT



Altech  
Smart Relays



Digital  
Panel Meters



Digital  
Timers

### SAFETY SWITCHES



Keyed  
Safety  
Switches



Keyed  
Solenoid  
Locking  
Switches



Hinged  
Safety  
Switches



Non-Contact  
Safety  
Switches



Safety  
Rope Pull  
Switches

### STANDARD SWITCHES



Limit  
Switches



Foot  
Switches

### SENSORS



Cylindrical &  
Capacitive



Flat Pack  
& Ring



Metal  
Detection